


# CHPMxxxxOFC

Professional flat speaker cables - OFC

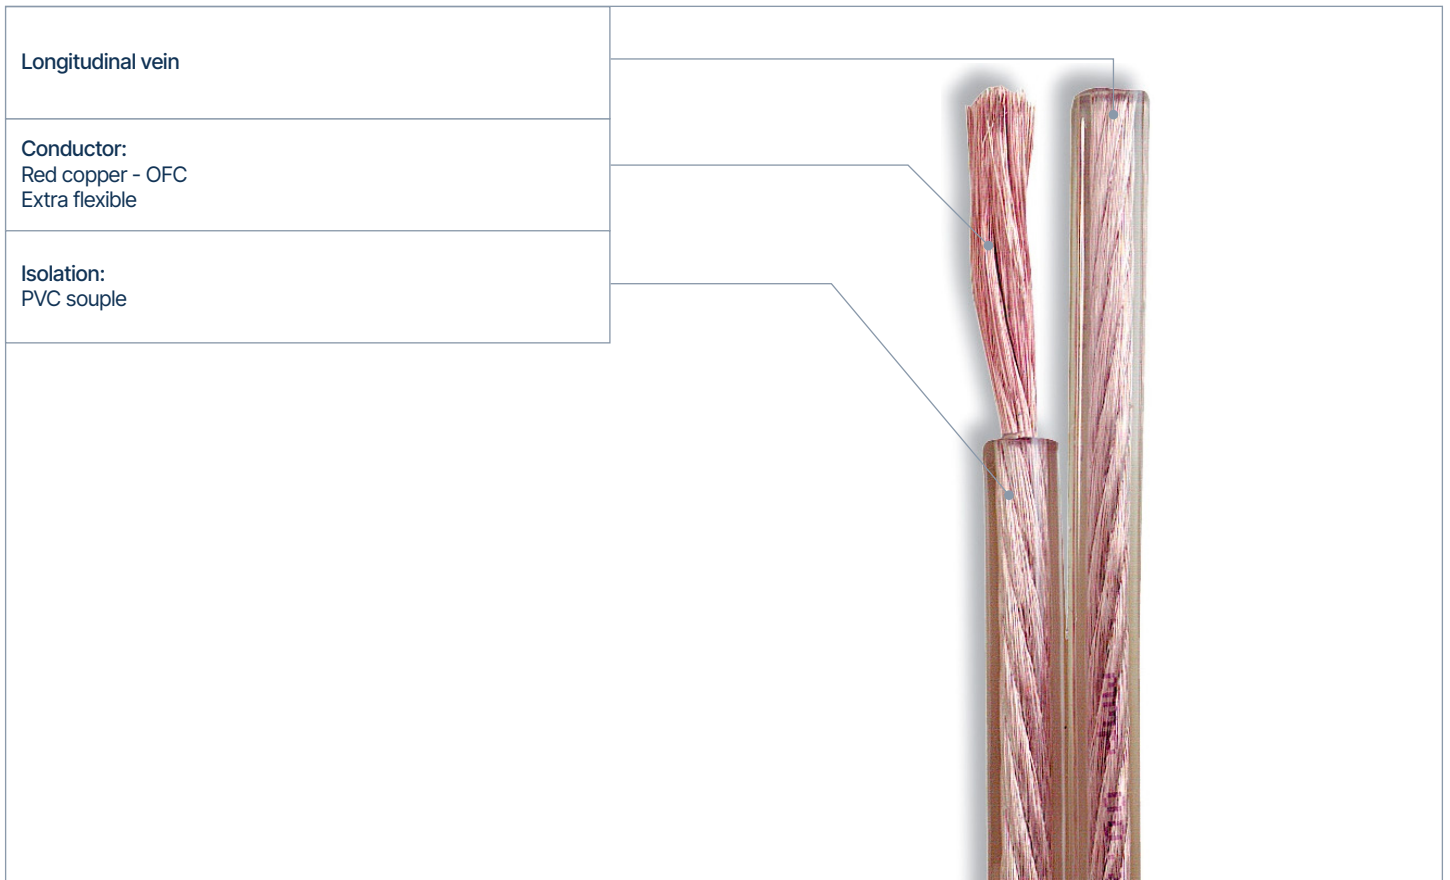

FT 2 16/2/2016 EN

## PRODUCT INFORMATION


### APPLICATION

Wiring of all types of sound systems  
Hi-Fi  
Wiring in fixed and mobile installations  
Great flexibility

### FEATURES



Operating temperature:  
Fixed position: - 30°C → + 70°C  
Mobile post: -10°C → +70°C



Minimum bending radius:  
8 x Ø



In compliance with the RoHS directive

### ELECTRICAL PROPERTIES

Tension:	100 V
Test voltage:	2000 V
Resistance of the soul at 20°C:	
1.5 mm <sup>2</sup> :	13.3 Ω/km
2.0 mm <sup>2</sup> :	9.42 Ω/km
2.5 mm <sup>2</sup> :	7,98 Ω/km

### PRODUCT REFERENCES

		Conductor composition	
CHPM2x15INCOFC	2 x 1,5	76 x 0,15 mm	3,4 x 7,8
CHPM2x2INCOFC	2 x 2,0	100 x 0,15 mm	3,5 x 8,0
CHPM2x25INCOFC	2 x 2,5	128 x 0,15 mm	3,8 x 8,6