

# H05VV-F


Flexible, harmonized cables designed for supplying power to mobile or semi-mobile household appliances.



Conductor:  
Red copper  
Grade 5 according to:  
IEC 60228

Isolation:  
PVC type Tl2  
Color code: HD308S2

Outer shell:  
PVC type TM2  
White or Gray

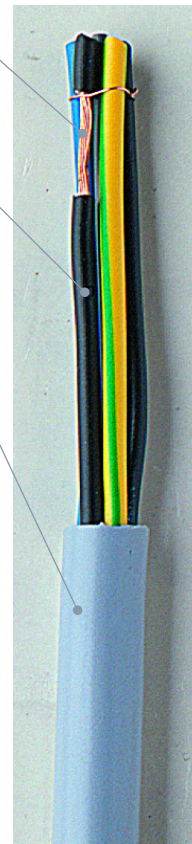

FT 7 08/06/2017 EN

## PRODUCT INFORMATION

### APPLICATION

The H05VV-F cables are harmonized cables used for interior connections of medium electrical devices.

### DESCRIPTION OF THE CABLE

Assembly: Helical

### ELECTRICAL PROPERTIES

Nominal voltage (U°/U): 300/500 V  
Test voltage: 2000 V

### FEATURES



Fire resistance:  
EN 60332-1  
EN 50575 :2014 + A1 :2016 Eca



Serving temperature:  
-5°C → +70°C







Minimum radius of curvature:  
6 x Ø



In compliance with the RoHS directive.

Reference standards:  
EN 50525-2-11

PRODUCT REFERENCES

			
VVF2X075	2 X 0,75	5,7 / 7,2	58
VVF2X1	2 X 1,00	5,9 / 7,5	68
VVF2X15	2 X 1,50	6,8 / 8,6	92
VVF2G25	2 X 2,50	8,4 / 10,6	140
VVF3G075	3 G 0,75	6,0 / 7,6	64
VVF3G1	3 G 1	6,3 / 8,0	76
VVF3G15	3 G 1,5	7,4 / 9,4	110
VVF3G25	3 G 2,5	9,2 / 11,4	165
VVF4G075	4 G 0,75	6,6 / 8,3	78
VVF4G1	4 G 1	7,1 / 9,0	96
VVF4G15	4 G 1,5	8,4 / 10,5	135
VVF4G25	4 G 2,5	10,1 / 12,5	200
VVF5G075	5 G 0,75	7,4 / 9,3	100
VVF5G1	5 G 1	7,8 / 9,8	120
VVF5G15	5 G 1,5	9,3 / 11,6	170
VVF5G25	5 G 2,5	11,2 / 13,9	255