

IDBAIESERVXX810

Server racks 19 inches wide, 800mm in width and 1000mm in depth.

+ BENEFITS

- Front and rear perforated door (63%)
- Reinforced structure able to support a static load of up to 1500kg
- Top and bottom cable entries, multiple
- Traps or brush cable grommets
- Front/rear Saloon doors - Removable and lockable side panels
- As standard, reinforced gas springs and wheels with brakes



DESCRIPTION / APPLICATIONS

The 19-inch server racks IDBAIESERVxx810 have been specially designed for intensive use and allow to accommodate active equipment up to 1,500 kg.

The front and back doors are made of perforated metal to ensure maximum ventilation.





The side panels are easily removable and lockable with a key.

The cables enter from the top or bottom through dedicated openings and are protected by brush cable glands.

Color: black RAL9005

Protection index: IP20

DIAGRAMS AND DIMENSIONS

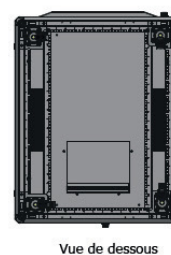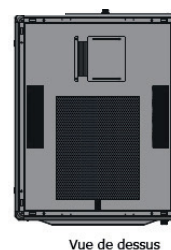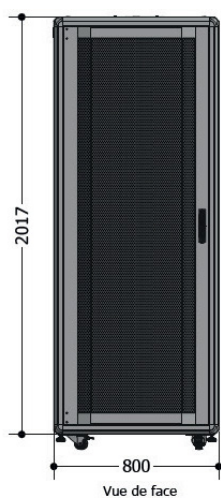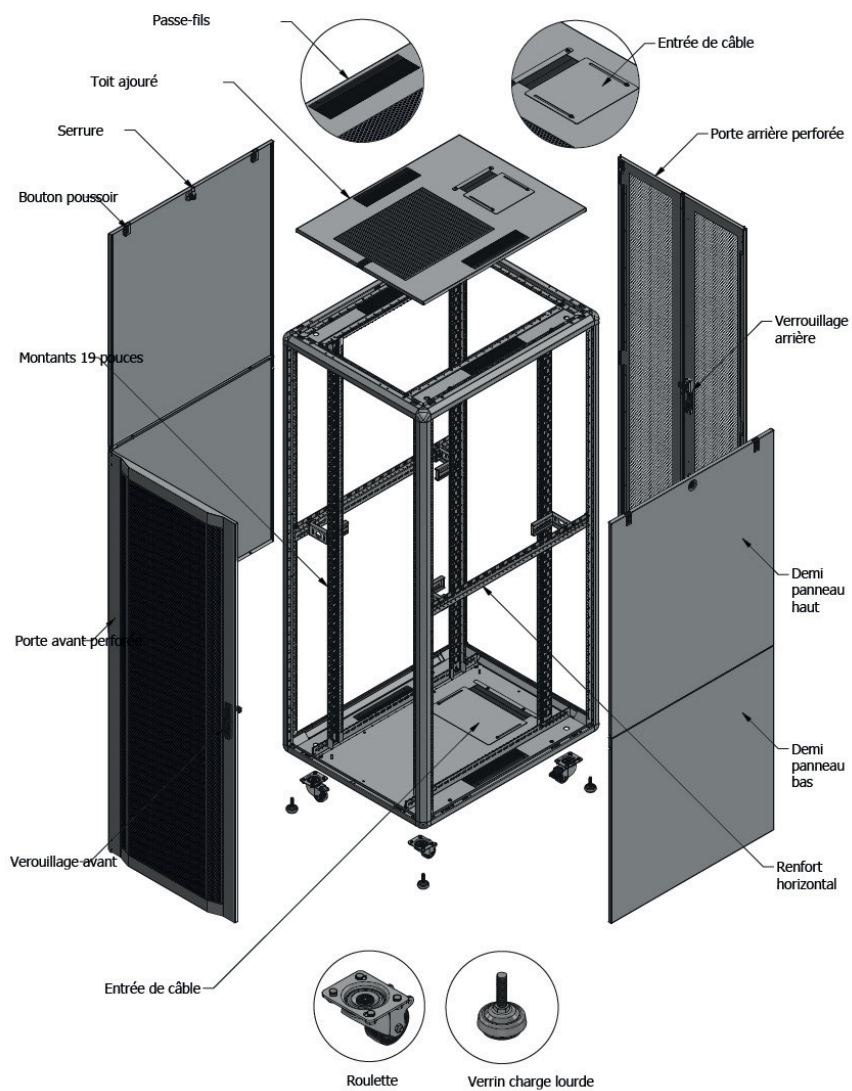

Reference	H (mm)	W (mm)	D (mm)	NET WEIGHT
IDBAIESERV42810	2017	800	1000	144 kg

SCHEMES AND DIMENSIONS

Reference	Designation
IDPLFIX1U250	Fixed shelf 1U P.250
IDPASSF1U	Brush grommet panel 1U
IDGUIDC1U	1U 4 hooks cable management panel
IDOB1U	Shutter 19" 1U
IDALIM8I	Aluminum block 19" 8 pc + inter
IDALIM8	Aluminum block 19" 8 pc



DIAGRAMS AND DIMENSIONS

REF	NAME	DESIGNATION	LOAD CAPACITY
IDBAIESERV42810	42 U	42U 800×1000 open front/back server rack.	1500 kg