


KX 6 BL

Coaxial cable 75 Ω type KX 6 - white outer sheath

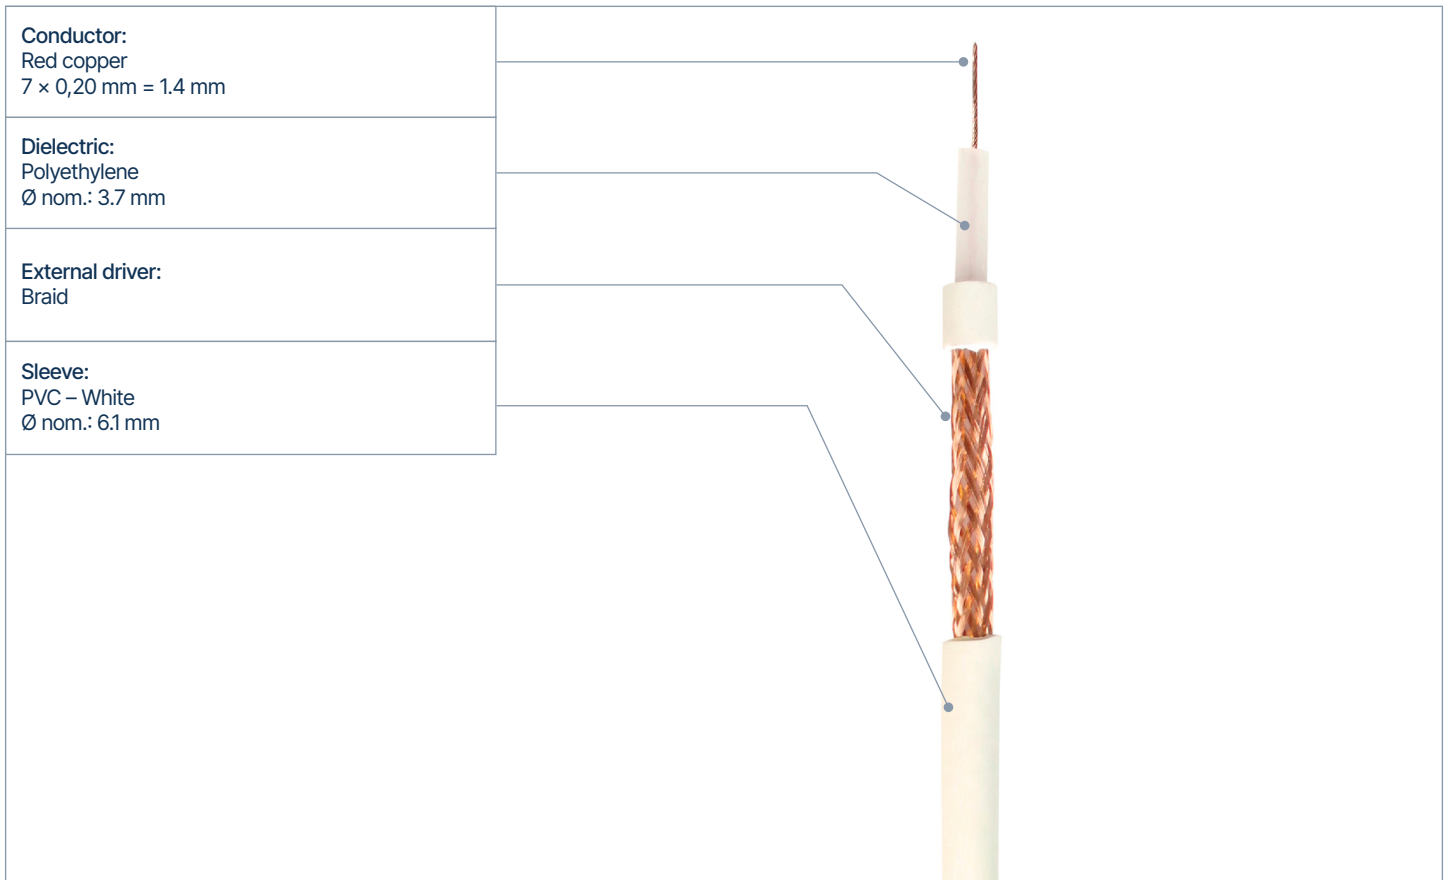

FT 3 08/06/2017 EN

PRODUCT INFORMATION

APPLICATION

These cables are used for signal transmission in analog video and surveillance video applications.

Crimp BNC
- CBNCM756 (male)
- CBNCF756 (female)
Sleeve: M756x
Crimping tool: PBNC68

ELECTRICAL PROPERTIES

Characteristic impedance at 200 MHz:	75 Ω
Rated Capacity:	67 pF/m
Insulation resistance at 20°C:	> 5000 MΩ.km
Dielectric strength at 50Hz:	> 4200 V
Attenuation at 200 MHz:	20,0 dB/100m

CHARACTERISTICS



Fire resistance:
IEC 60332-1
EN 50575 :2014 + A1 :2016 Eca



Radius of curvature:
Fixed use: 5 x Ø
Mobile Usage: 10 x Ø



Operating temperature:
- 10°C → + 70°C



Compliant with the RoHS Directive