


KX 8

Coaxial cable 75 Ω - standard base: UTE C 93-550

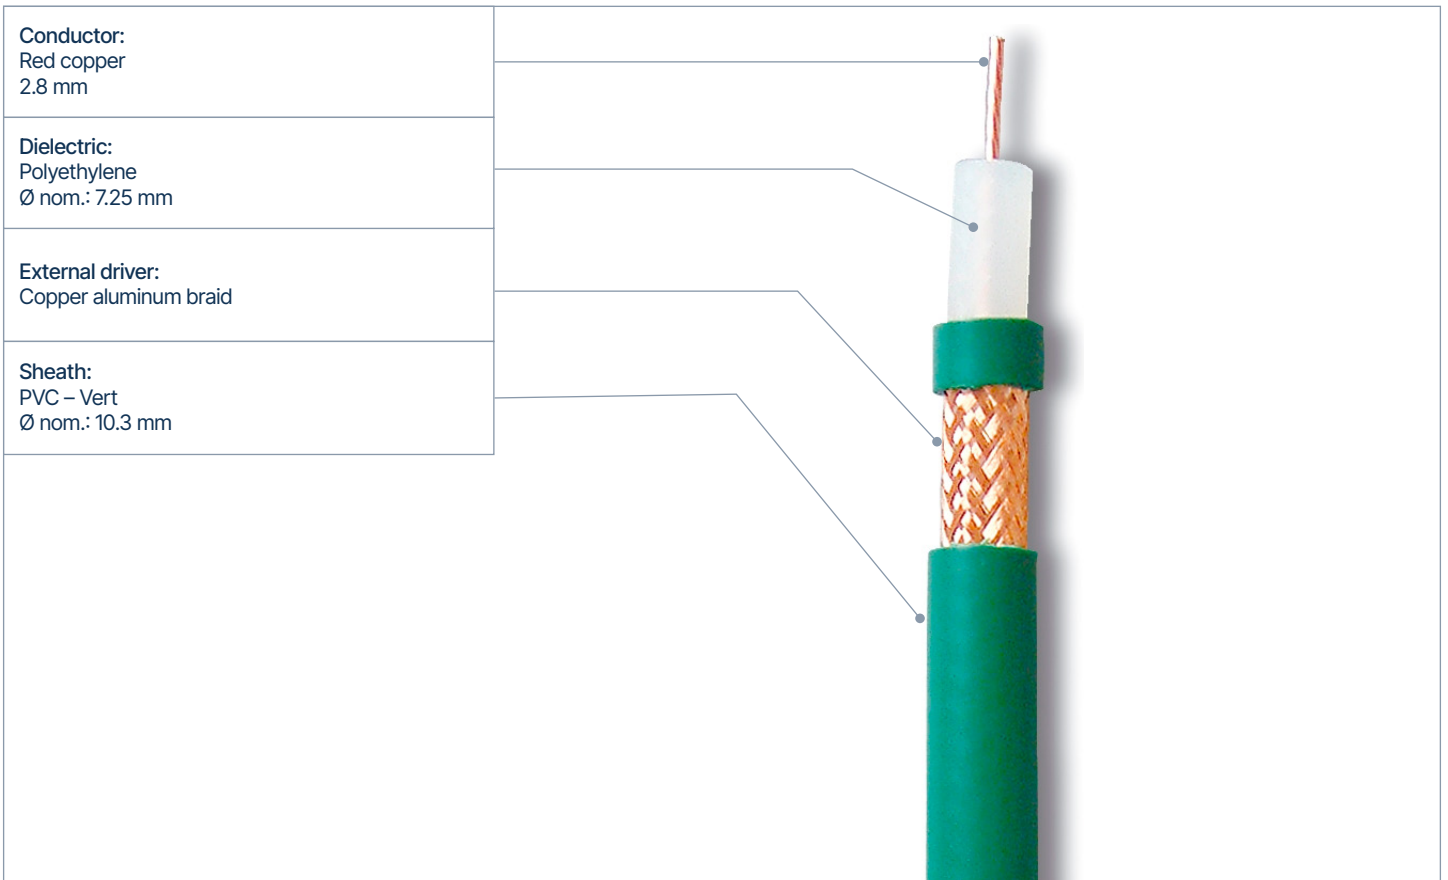

FT 3 10/03/2017 EN

PRODUCT INFORMATION




APPLICATION

These cables are used for signal transmission in analog video and video surveillance applications.

ELECTRICAL PROPERTIES

Characteristic impedance at 200 MHz:	75 Ω
Rated capacity:	67 pF/m
Isolation resistance at 20°C:	> 5000 MΩ.km
Dielectric strength at 50Hz:	> 5000 V
Attenuation at 200 MHz:	12,0 dB/100m

FEATURES

 Operating temperature: - 10°C → + 70°C	 Kg/Km Weight: 110 kg/km
 Radius of curvature Fixed length: 50 mm Mobile use: 100 mm	 Compliant with the RoHS Directive