


# SIL TBT

Flat two-conductor silicone cables.



Conductor:  
Tinned copper  
Class 5 according to IEC 60228

Isolation:  
Silicone elastomer  
Color: white

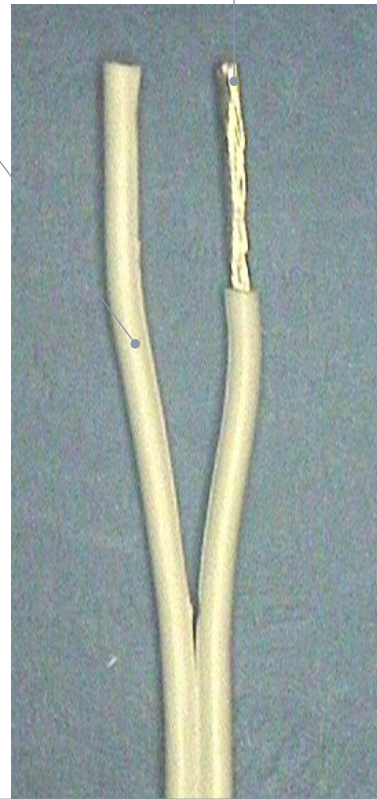

FT 4 11/06/15 EN

## PRODUCT INFORMATION

### APPLICATION

Cable for installing TBT (extra low voltage) lighting.

### ELECTRICAL PROPERTIES

Nominal voltage (U<sup>0</sup>/U): 300/500 V

Test voltage: 2000 V

### FEATURES



Serving temperature:  
-60°C → +180°C



Compliant with the RoHS directive

### PRODUCT REFERENCES

			
SIL2X15TBTC50	2 X 1.5	5.6 X 2.8	45
SIL2X25TBTC50	2 X 2.5	6.8 X 3.4	70
SIL2X4TBTC50	2 X 4	8.4 X 4.2	110