


REF : SYTx20RG

Phone cable SYT RED

FT 1 24/10/2022 EN

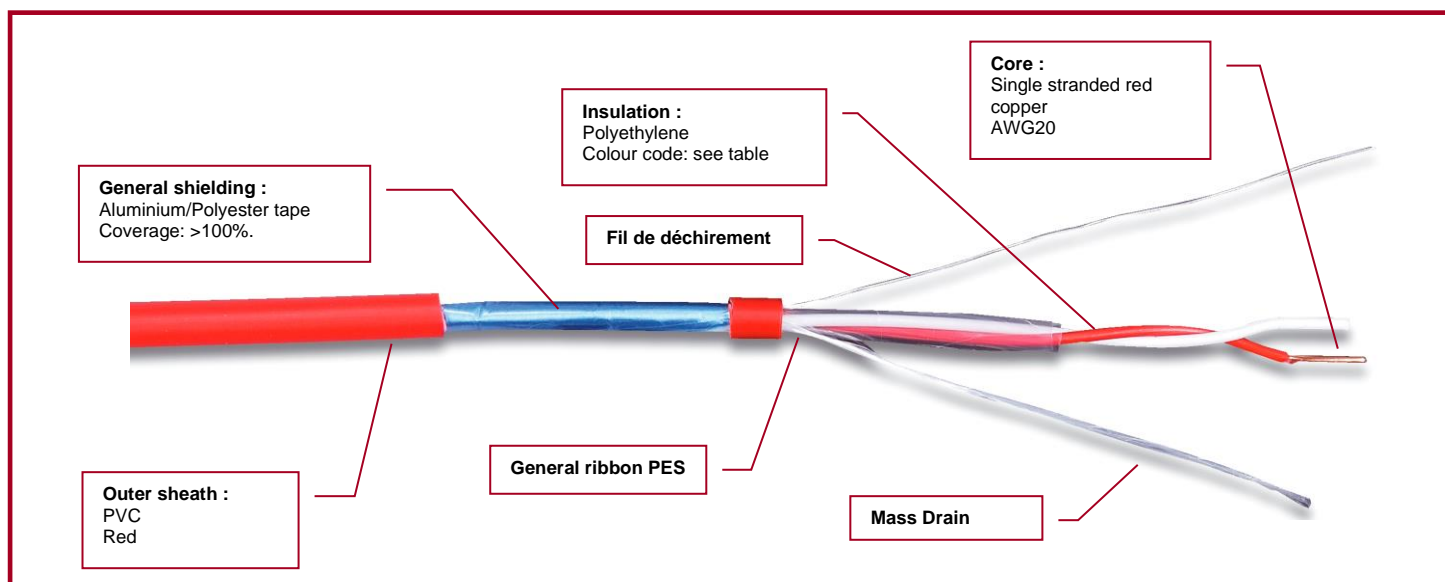

PRODUCT INFORMATION

Application

SYT RED cables for remote alarm transmission and for the links between the smoke detectors and the control panel.

Cable description

Assembly: in pairs under polyester tape

Marking :

ID CABLES - D.I. - SYT 1 NUM nx2xAWG 20 + batch number + metric marking
With n: 1, 2 or 3 pairs

Electrical characteristics

Maximum voltage : **180 Vac**
 Impedance (1 MHz) + 20% : **100 Ω**
 Cond/cond capacity : **< 70 nF/km**
 Max linear resistance : **40.5 Ω/km**

Specifications



Fire resistance :
IEC 60332-1

EN 50575 :2014 + A1 :2016 **Eca**



Service temperature :
- 10°C → + 70°C






RoHS compliant

REF : SYTx20RG

Phone cable SYT RED

FT 1 24/10/2022 EN

Product references

	Construction	Colour code		
SYT 1.20 RGxx	1x2xAWG20	P1 : white/red	4.3	28
SYT 2.20 RGxx	2x2xAWG20	P1: light blue/white P2: light blue/dark blue	6.0	50
SYT 3.20 RGxx	3x2xAWG20	P1: light blue/white P2: light blue/dark blue P3 : light blue/yellow	6.8	64